

P

PUMPS

IUSI EX50 - EX75

EN. PIUSI EX50 - EX75 satisfies the strict ATEX / IECEx directive concerning the use of materials in potentially explosive atmospheres.


- Sturdy and compact structure;
- Cast iron body;
- High efficiency pump that can deliver up to 50-75 l / min, with reduced absorption to ensure a long service life;
- Anti-noise filter (electromagnetic compatibility EMC);
- Flanged components: pump, meter and filters can be installed or replaced without the use of sealant, making connection quick and safe;
- Bypass valve built;
- Thermal protection;
- Non-return valve and pressure relief valve;
- Suction unit with integrated filter.

ES. PIUSI EX50 - EX75 cumple con las directivas estrictas de ATEX / IECEx sobre el uso de los materiales en atmósferas potencialmente explosivas.

- Estructura fuerte y compacta
- Cuerpo de hierro fundido
- Bomba de alto rendimiento que puede suministrar hasta 50-75 l / min, con absorción reducida para asegurar larga vida
- Filtro anti-ruido (compatibilidad electromagnética EMC);
- Componentes con bridas: bomba, medidor y filtros se pueden instalar o reemplazar sin el uso de sellador, permitiendo una conexión rápida y segura
- Válvula de bypass incorporada
- Protección térmica
- Válvula de retención y válvula de descarga de sobrepresión
- Unidad de succión con filtro integrado


RU. PIUSI EX50 - EX75 соответствует требованиям строгих директив АТЕХ/IECEx, относящихся к использованию оборудования в потенциально взрывоопасных атмосферах.

- Прочная и компактная конструкция;
- Чугунный корпус;
- Высокоэффективный двигатель, способный подавать до 50-75 л/мин, уменьшенное энергопотребление, гарантирующее длительную службу;
- Противозумовой фильтр (электромагнитная совместимость ЭМС);
- Фланцевые детали: насос, счетчик литров и фильтры можно установить или заменить без использования герметика, позволяя выполнять соединения быстро и надежно;
- Встроенный обводной клапан;
- Тепловая защита.

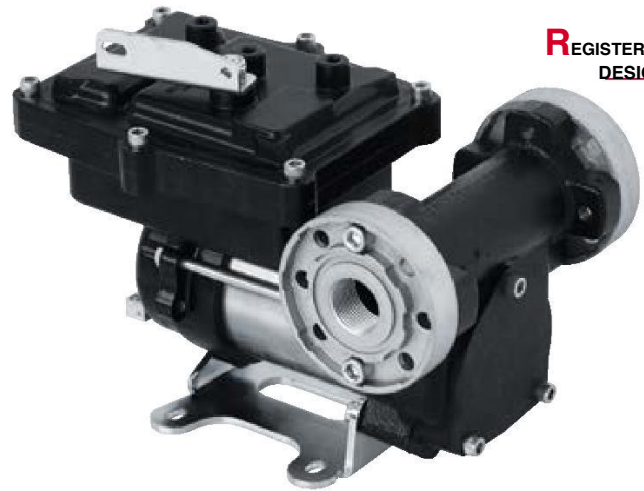

REGISTERED DESIGN

DIMENSIONS

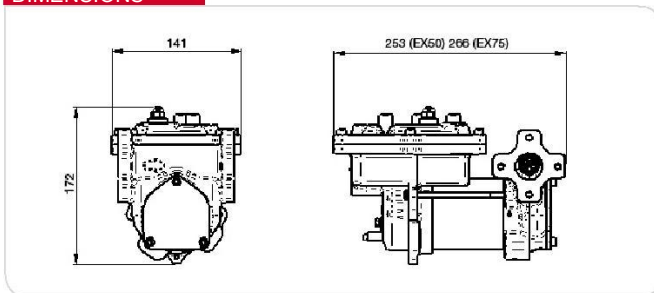

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		N. Boxes/ Europallet	
	kg	lbs	mm	pcs/ box		
F00371000	6,9	15,2	345x175x225	1	60	84
F00372020	7,9	17,4	345x175x225	1	60	84
F0037300A	6,9	15,2	345x175x225	1	60	84
F0037402A	7,9	17,4	345x175x225	1	60	84
F00380000	8	17,8	350x185x260	1	60	84



PUMPS

ANTIFREEZE
BIO DIESEL
DIESEL
FOOD
GASOLINE
GREASE
KEROSENE
OIL
WATER
WINDSCREEN



Flow-rate
up to
75 l/min
(up to 19,8 gpm)



EX50 PUMP



EX50 KIT
- Integrated Check valve and Pressure Relief valve
- nozzle holder switch
- drum 2" connector

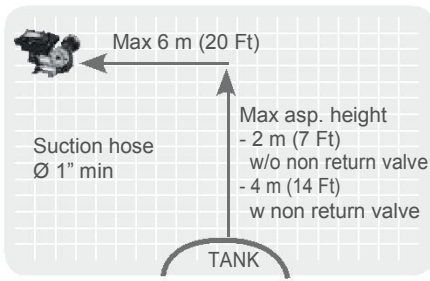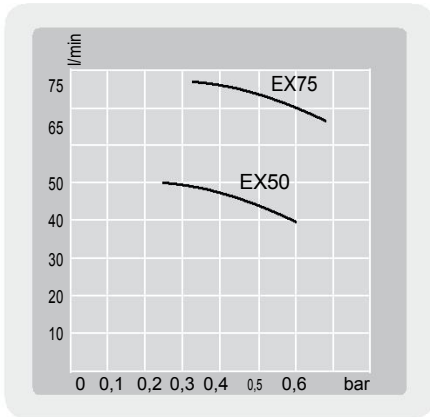

Our pump complies with the following marking ATEX/IECEX

II	2	G	Ex	EX50 EX75	EX50 EX75	T4	Gb
GROUP	CATEGORY	TYPE OF EXPLOSIVE ATMOSPHERE	PERMANENT PREFIX	PROTECTION METHOD	GAS CLASS	TEMPERATURE CLASS	EQUIPMENT PROTECTION LEVEL
				d db	IIA IIB		

FEATURES

On/off switch

Flanged connection

Compact and sturdy construction

ON REQUEST

UL Listed Motor version (available)

Filter head + Filter

Code: F18796000

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		Voltage			Duty cycle on/off min.	rpm	Inlet BSP
			l/min	gpm	AC V./Hz DC Volt	Power Watt	Amp. max.			
F00371000	EX50 12V DC ATEX	D G K	50	13	12	250	21	30/60	2700	1"
F00372020	Kit Drum EX50 12V DC ATEX	D G K	50	13	12	250	21	30/60	2700	1"
F0037300A	EX50 230V AC ATEX	D G K	50	13	230/50-60	250	1	30/60	2700	1"
F0037402A	Kit Drum EX50 230V AC ATEX *	D G K	50	13	230/50-60	250	1	30/60	2700	1"
F00380000	EX75 12V DC ATEX	D G K	75	19,8	12	240	20	30/30	2700	1"

(*) Upon request it is available with different voltages and 60 Hz frequency
The pump can be used only with the following fluids: - diesel - kerosene - petrol - petrol alcohol mixed max 15% - avgas 100/100LL (pump only) - jet A/A1 (pump only) - aspen 2/4

DISPENSERS
PUMPS
METERS
METERS NOZZLE
NOZZLE
REEL MONITORING EQUIPMENTS HOSE
FLUID SPECIAL
FILTERING
ACCESSORIES